


DIMENSIONS (mm)

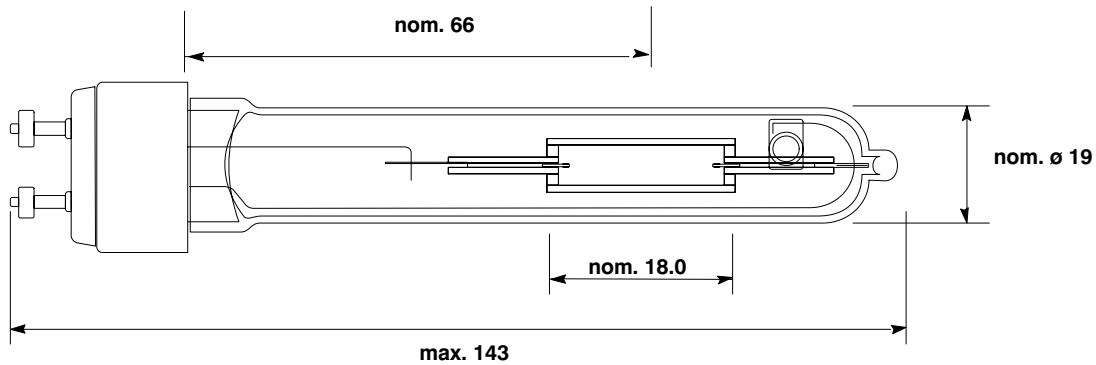

Cap : PGZ12
 Bulb : UV–stop quartz glass

<u>ELECTRICAL DATA:</u>		<u>NOMINAL VALUE</u>	<u>MIN.</u>	<u>MAX.</u>
Lamp wattage	(W) :	90		
Lamp voltage	(V) :	89	81	97
Lamp current	(A) :	0.98		
Lamp warm–up current	(A) :		0.98	1.4

OPERATING CONDITIONS:

Burning position	:	any		
Fixture type	:	closed		
Ballast type	:	BriteTronic Xtreme 0090 CMO–TW		
Supply voltage	(%) :		90	110
Ignitor pulse	(kVp) :			5
Ignition time	(sec) :			30
Bulb temperature	(° C) :			470

LAMP LIFE

T90 (90% survivals)	(h) :	20000		
---------------------	-------	-------	--	--

PHOTOMETRIC DATA :

Initial luminous flux	(lm) :	10450		
Lumen maintenance@16000h	(%) :	84		
Luminous efficacy	(lm/W) :	116		
Correlated colour temperature	(K) :	2800		
Colour rendering index	:	66		

ATTENTION : Lamps comply with the requirements of IEC publication 1167.
 Luminaires must comply with 598–1. Inspection is in accordance with IEC 410.
 The luminaire must be provided with a safety screen (shattering and UV).

Issued by : TIENEN
 Date : 04.05.2009
 Revision date : 08.12.2011

DATA SHEET

Specification No. : 43–75–90/B
 Supersedes : 43–75–90/A 17.09.2010
 Page 1 of 1