




DIMENSIONS (mm)

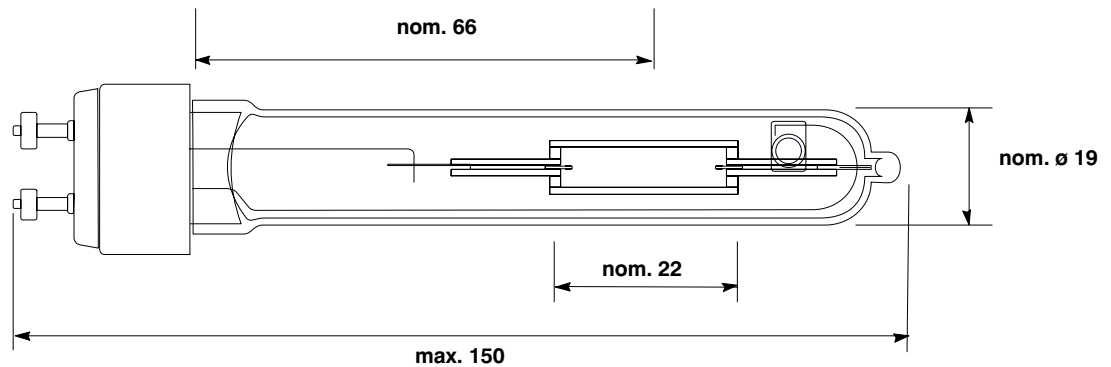

Cap : PGZ12
Bulb : UV–stop quartz glass

<u>ELECTRICAL DATA:</u>		<u>NOMINAL VALUE</u>	<u>MIN.</u>	<u>MAX.</u>
Lamp wattage	(W) :	140		
Lamp voltage	(V) :	94	88	100
Lamp current	(A) :	1.49		
Lamp warm–up current	(A) :		1.49	1.9

OPERATING CONDITIONS:

Burning position	:	any		
Fixture type	:	closed		
Ballast type	:	BriteTronic Xtreme 0140 CMO–TW		
Supply voltage	(%) :		90	110
Ignitor pulse	(kVp) :			5
Ignition time	(sec) :			30
Bulb temperature	(° C) :			550

LAMP LIFE

T90 (90% survivals)	(h) :	16000
---------------------	-------	-------

PHOTOMETRIC DATA :

Initial luminous flux	(lm) :	16500
Lumen maintenance@16000h	(%) :	85
Luminous efficacy	(lm/W) :	118
Correlated colour temperature	(K) :	2800
Colour rendering index	:	66

ATTENTION : Lamps comply with the requirements of IEC publication 62035.
Luminaires must comply with 598–1. Inspection is in accordance with IEC 410.
The luminaire must be provided with a safety screen (shattering and UV).

Issued by : TIENEN
Date : 04.05.2009
Revision date : 08.12.2011

DATA SHEET

Specification No. : 43–75–140/A
Supersedes : 43–75–140 04.05.2009
Page 1 of 1