


OUTLINE

Dimensions in mm.

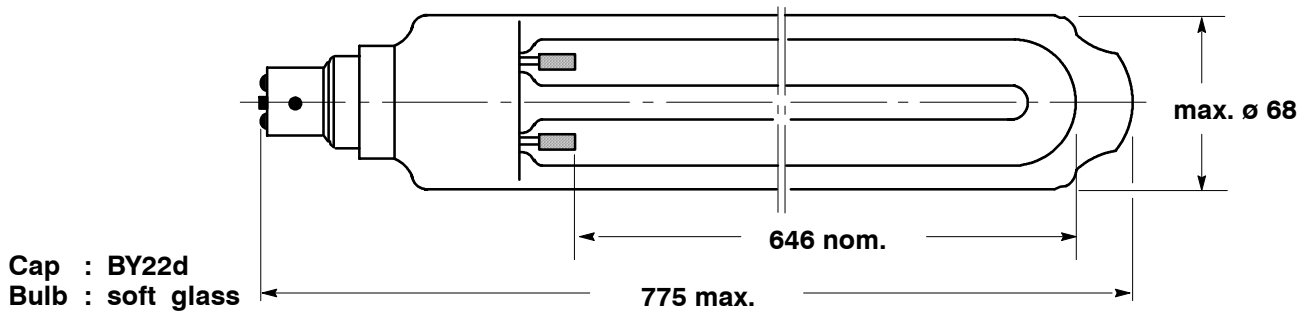

ELECTRICAL DATA:

		NOMINAL VALUE	MIN.	MAX.
Lamp power	(W)	135		153
Lamp voltage (1)	(V)	164		185
Lamp current (1)	(A)	0.95		

OPERATING CONDITIONS:

Fixture rating	:	open		
Burning position	:	horizontal $\pm 20^\circ$		
Ballast type	:	inductive type ballast acc. IEC publ. 459		
Voltage/Current ratio	(Ω)	655		
Ignitor	:	SX 74 or equivalent		
Lamp starting voltage (2)	(V)			540
Supply volt. for ignition	(V)		200	
Supply volt. for stable operation	(V)		200	
Run-up time (3)	(min)	10		
Series capacitor	(μ F)	6.8/420V		
Cap rim temperature	($^\circ$ C)			150
Bulb temperature	($^\circ$ C)			150

PHOTOMETRIC DATA :

Initial luminous flux (1)	(lm)	21 500		
Efficacy	(lm/W)	159		
Correlated colour temperature	(K)	1800		
Spectral energy distribution	:	almost monochromatic yellow light with a wavelength of 589/590 nm		

(1) after 100 burning hours

(2) at -18° C ; at lampterminals

(3) period of time between ignition and the moment that the lamp has reached 80% of its final luminous flux.

ATTENTION : The product must be used with suitable operating equipment and in accordance with specified data. Lamps comply to IEC standard : IEC 60192

Issued by : TIENEN
Date : 09.02.2006
Revision date :

DATA SHEET

Specification No. : 45-13-135
Supersedes :
Page 1 of 1