


DIMENSIONS (mm)

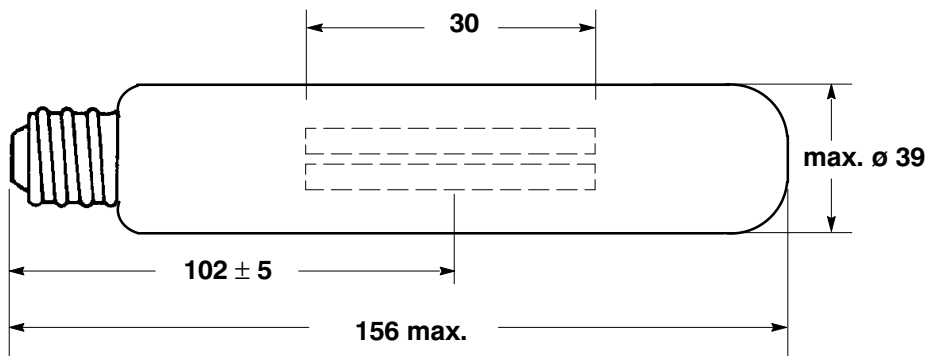

Cap : E27/27 (IEC 61-1)
Bulb : soft glass

ELECTRICAL DATA:

| | | NOMINAL VALUE | MIN. | MAX. |
|----------------------|-------|---------------|------|------|
| Lamp Wattage | (W) : | 50 | | |
| Lamp Voltage | (V) : | 85 | 70 | 100 |
| Lamp Current | (A) : | 0.76 | | |
| Lamp Warm-up current | (A) : | | 0.76 | 1.52 |

OPERATING CONDITIONS:

| | | | | |
|------------------------|---------|-------------------------------|-----|-----|
| Burning Position | : | any | | |
| Ballast Type | : | SHP-50W/220V,230V, 240V, 250V | | |
| Voltage/Current ratio | : | 246 | | |
| Calibration Current | (A) : | 0.76 | | |
| Supply Voltage | (%) : | | 92 | 106 |
| Ignitor Pulse | (kVp) : | | 1.8 | 2.5 |
| Compensation Capacitor | (µF) : | 8 | | |
| Cap Rim Temperature | (°C) : | | | 210 |
| Bulb Temperature | (°C) : | | | 310 |

LAMP LIFE :

| | | |
|--------------------|-------|------------------------------|
| Rated Average Life | (h) : | 40000 (50 % survival rate) |
| T 90 | (h) : | 21000 (90 % survival rate) |

PHOTOMETRIC DATA :

| | | |
|-------------------------------|-----------|------|
| Initial Luminous Flux | (lm) : | 4000 |
| Luminous Efficacy | (lm/W) : | 80 |
| Correlated Colour Temperature | (K) : | 2050 |
| Colour Rendering Index | (class) : | 4 |

ATTENTION : Lamps comply with the requirements of IEC publication 60662. Ballasts and ignitors must comply with IEC 60923 and 60927 respectively. Luminaires must be in accordance with IEC 60598-1 and 60598-2-3. Inspection is in accordance with IEC 60410.

Issued by : TIENEN
Date : 24.02.1994
Revision date : 21.04.2009

DATA SHEET

Specification No. : 45 29 050/F
Supersedes : 4529050/E 01.10.2007
Page 1 of 1