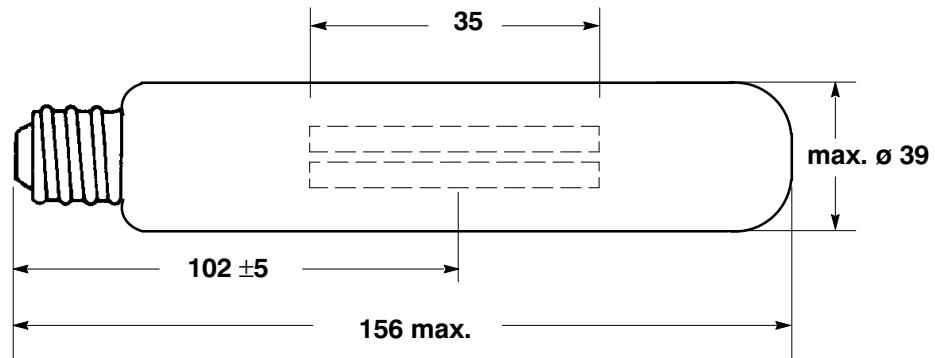
**DIMENSIONS (mm)**

Cap : E27/27 (IEC 61-1)  
Bulb : soft glass

<b>ELECTRICAL DATA:</b>		<b>NOMINAL VALUE</b>	<b>MIN.</b>	<b>MAX.</b>
Lamp Wattage	(W) :	70		
Lamp Voltage	(V) :	90	75	105
Lamp Current	(A) :	0.98		
Lamp Warm-up current	(A) :		0.98	1.96

**OPERATING CONDITIONS:**

Burning Position	:	any		
Ballast Type	:	SHP-70W/220V,230V, 240V, 250V		
Voltage/Current ratio	:	188		
Calibration Current	(A) :	0.98		
Supply Voltage	(%) :		92	106
Ignitor Pulse	(kVp) :		1.8	2.5
Compensation Capacitor	(µF) :	10		
Cap Rim Temperature	(°C) :			210
Bulb Temperature	(° C) :			310

**LAMP LIFE :**

Rated Average Life	(h) :	55000 ( 50 % survival rate )
T 90	(h) :	24000 ( 90 % survival rate )

**PHOTOMETRIC DATA :**

Initial Luminous Flux	(lm) :	6500
Luminous Efficacy	(lm/W) :	93
Correlated Colour Temperature	(K) :	2050
Colour Rendering Index	(class) :	4

**ATTENTION :** Lamps comply with the requirements of IEC publication 60662. Ballasts and ignitors must comply with IEC 60923 and 60927 respectively. Luminaires must be in accordance with IEC 60598-1 and 60598-2-3. Inspection is in accordance with IEC 60410.

Issued by : TIENEN  
Date : 24.02.1994  
Revision date : 21.04.2009

**DATA SHEET**

Specification No. : 45 29 070/F  
Supersedes : 4529070/E 01.10.2007  
Page 1 of 1