




## DIMENSIONS (mm)

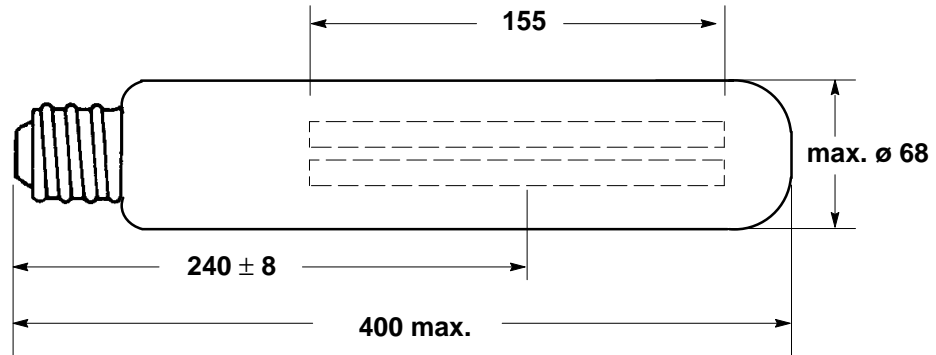

Cap : E40/45 (IEC 61-1)  
 Bulb : hard glass

## ELECTRICAL DATA:

		NOMINAL VALUE	MIN.	MAX.
Lamp wattage	(W) :	960		
Lamp voltage	(V) :	100	85	115
Lamp current	(A) :	10.6		
Lamp warm-up current	(A) :		10.3	15.0

## OPERATING CONDITIONS:

Burning position	:	any		
Ballast type	:	SHP-1000W/220V, 230V, 240V, 250V		
Voltage current ratio	:	16.8		
Calibration current	(A) :	10.3		
Supply voltage	(%) :		92	106
Ignitor pulse	(kVp) :		3.5	5.0
Compensation capacitor	(µF) :	100		
Cap rim temperature	( °C) :			250
Bulb temperature	( °C) :			400

## LAMP LIFE:

Rated Average Life	(h) :	20 000
--------------------	-------	--------

## PHOTOMETRIC DATA :

Initial luminous flux	(lm) :	130 000
Luminous efficacy	(lm/W) :	135
Correlated colour temperature	(K) :	2050
Colour rendering index	(class) :	4

**ATTENTION :** Lamps comply with the requirements of IEC publication 60662. Ballasts and ignitors must comply with IEC 60923 and 60927 respectively. Luminaires must be in accordance with IEC 60598-1 and 60598-2-3. Inspection is in accordance with IEC 60410.

Issued by : TIENEN  
 Date : 20.05.2003  
 Revision date : 22.03.2004

## DATA SHEET

Specification No. : 45-29-1000/A  
 Supersedes : 45-29-1000 20.05.2003  
 Page 1 of 1