




MECHANICAL DATA (mm):

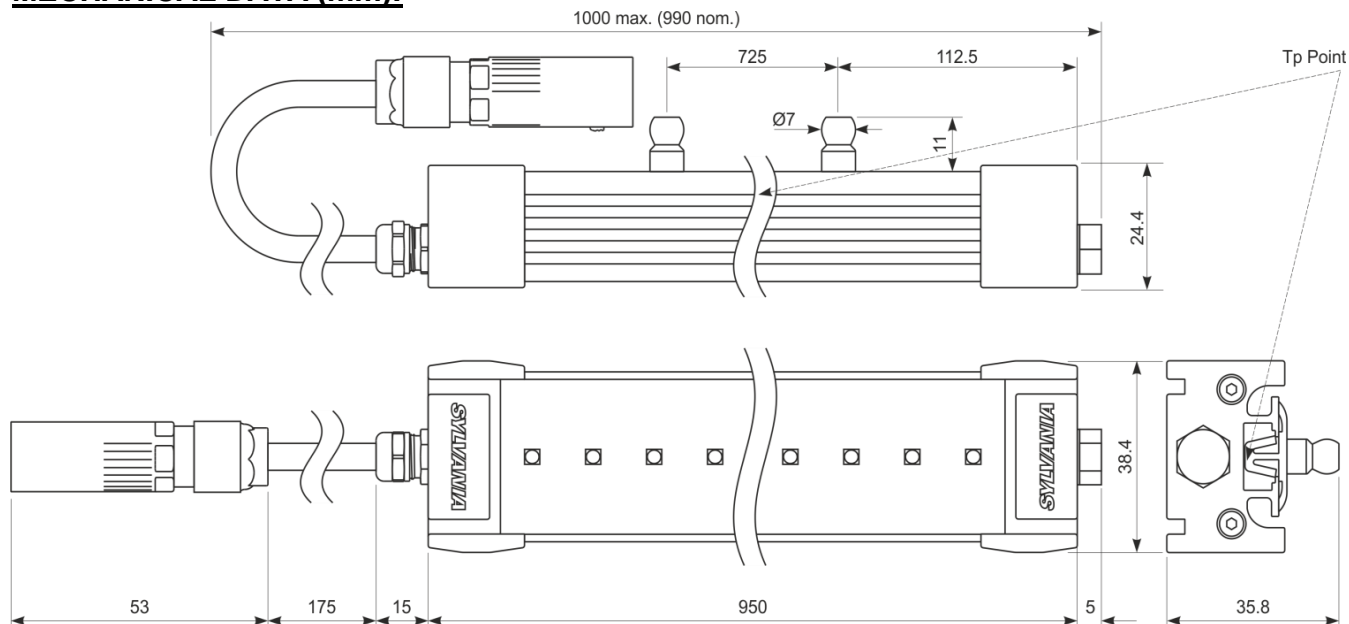

Electrical Connector: Techno TH381 IP68 Male Mass: 850g
 Mechanical Connector: 7mm ball latch, see drawing Finish: Anodised Aluminium & Antireflex glass

ELECTRICAL DATA

			RATED	MIN.	MAX.
Power	(W)	:	63	0	91
Voltage	(V)	:	45	44	46
Current	(mA)	:	1400	0	2000
Supply Frequency	(Hz)	:	DC	-	-
Power Factor	(λ)	:	1.0	-	-

PHOTOMETRIC DATA

Beam Angle	(°)	:	120	110	130
Luminous Flux	(lm)	:	3750	3375	4125
Luminous Efficacy	(lm/W)	:	59.8	-	-
Photosynthetic Flux	(pμm)	:	30500	27450	33550
Photosynthetic Efficacy	(pμm/W)	:	486	-	-
Photosynthetic Photon Flux	(μmol/s)	:	171	154	188
Photosynthetic Photon Efficacy	(μmol/J)	:	2.73	-	-
Photosynthetic Photon Flux Density @ 1m	(μmol/s/m²)	:	54	-	-
Biologically Active Photon Flux	(μmol/s)	:	188	169	207
Biologically Active Photon Efficacy	(μmol/J)	:	3.00	-	-
Biologically Active Photon Flux Density @ 1m	(μmol/s/m²)	:	58	-	-
Spectrum B ₄₀₀₋₅₀₀ : G ₅₀₀₋₆₀₀ : R ₆₀₀₋₇₀₀ : FR ₇₀₀₋₈₀₀	(%)	:	29% : 10% : 55% : 6%	-2%	+2%
Chromaticity Co-Ordinates	(x,y)	:	CCx=0.301 CCy=0.171	-	-
Colour Rendering Index	(Ra)	:	22	-	-

THERMAL DATA:

T _j (LED Junction temperature)	(°C)	:	60	-40	120
T _p (Performance temperature)	(°C)	:	50	-40	110

APPLICATION: LED Module for horticultural applications. IP66 construction suitable for humid environments.
 User-replaceable LED module for SELV applications. For operation with constant current driver.
 Complies with IEC 62717 & IEC 62471

Issued by : TIENEN

Revision date : 06-IX-2021


DATA SHEET

Specification No. : 71-X-0020914/C


Page : 1 of 2



PHOTOMETRIC GRAPHICS:

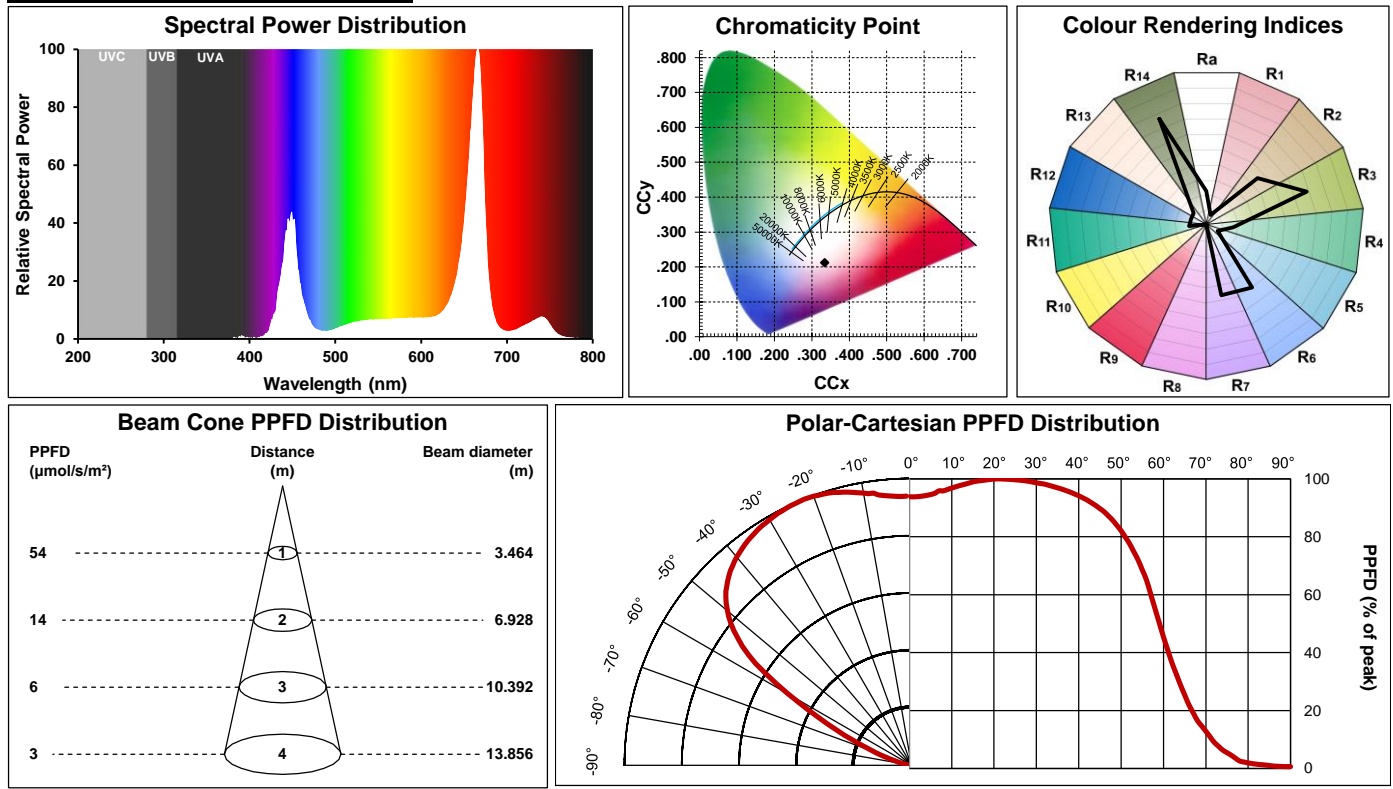

PERFORMANCE GRAPHICS:

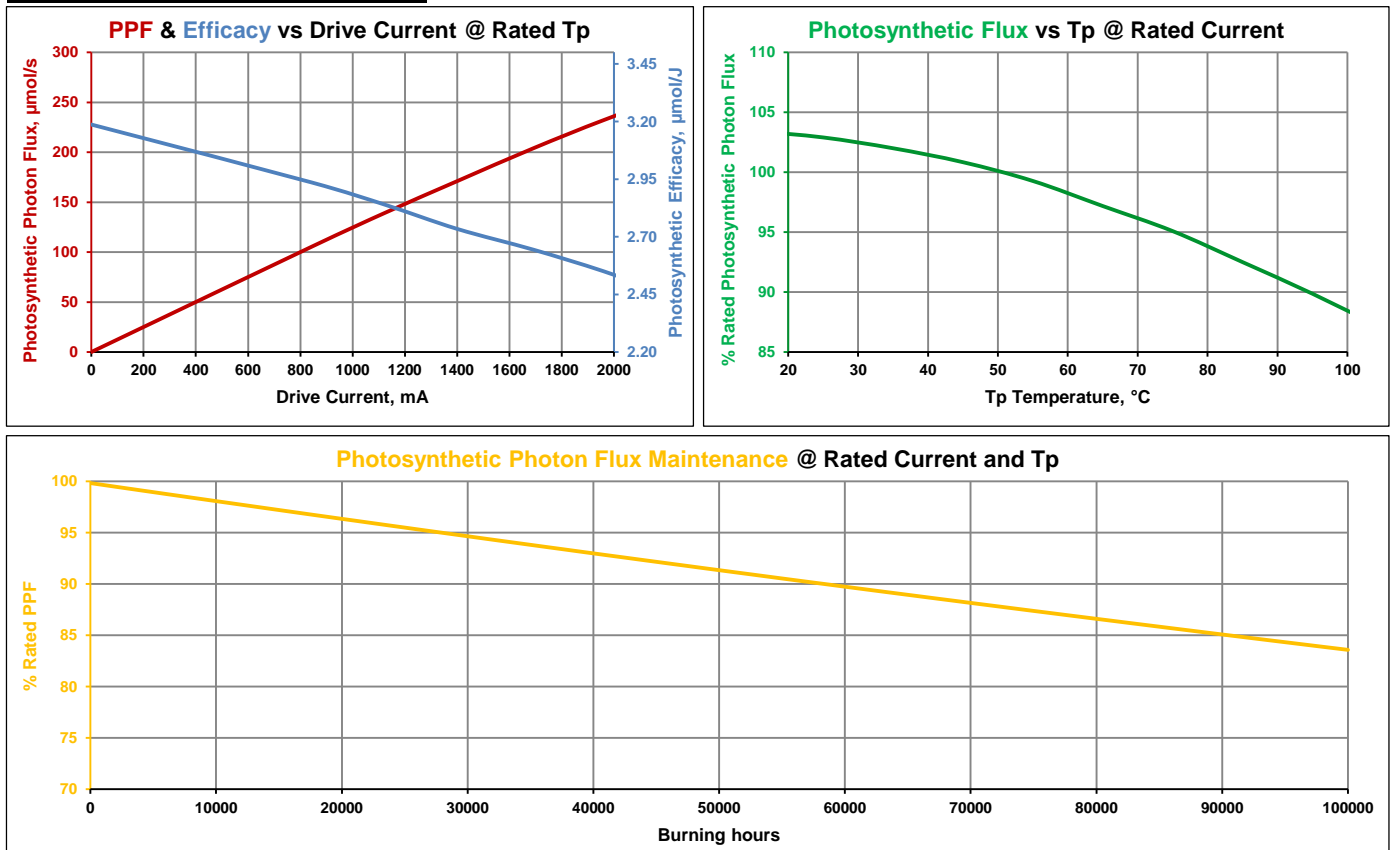

Issued by : TIENEN
Revision date : 06-IX-2021

DATA SHEET

Specification No. : 71-X-0020914/C
Page : 2 of 2