IS1600
IS500
220-240 V 50/60 Hz
ta 35°C

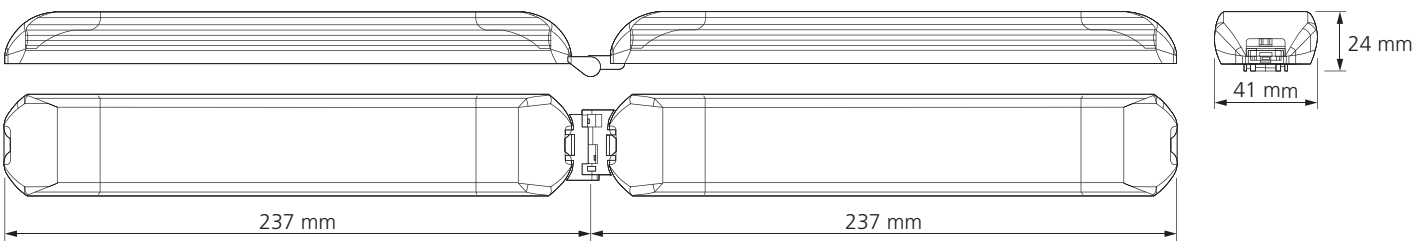
24 mm
41 mm
237 mm
237 mm

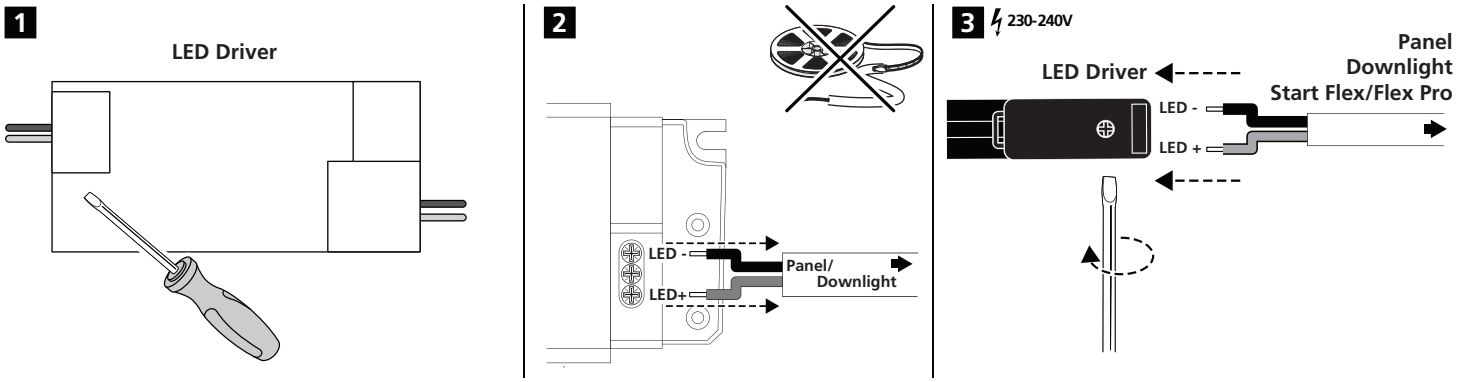
1
LED Driver
2
LED -
LED+
Panel/
Downlight
3
230-240V
LED Driver
Panel
Downlight
Start Flex/Flex Pro
LED -
LED +

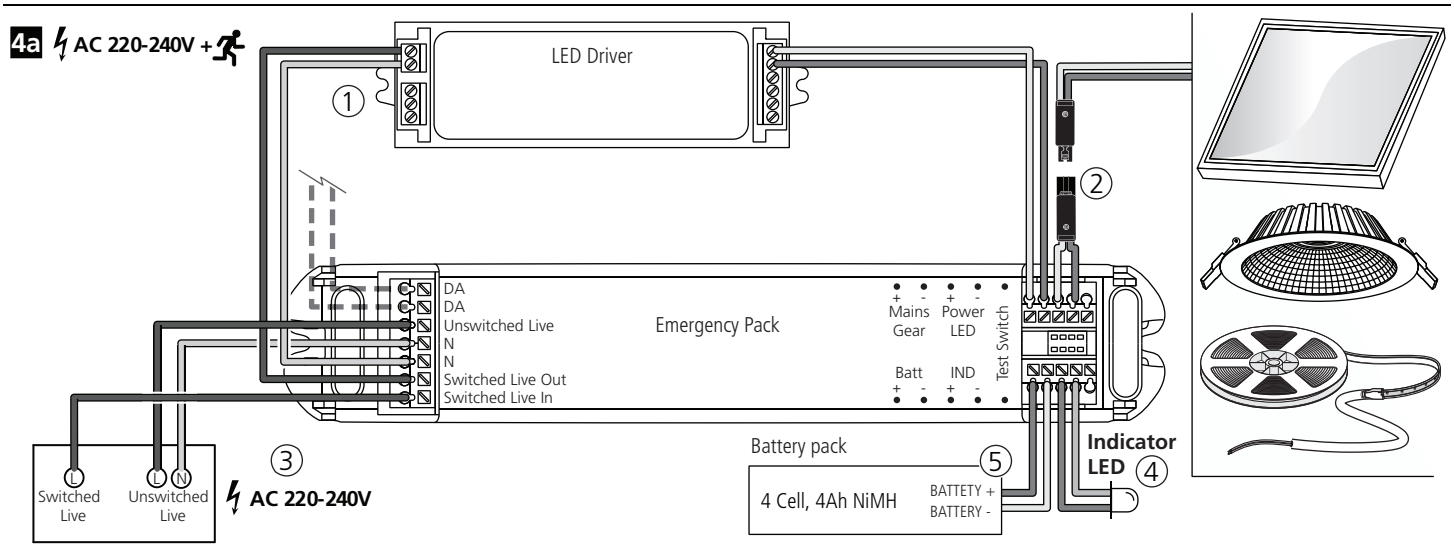
4a
AC 220-240V +
LED Driver
1
2
DA
DA
Unswitched Live
N
N
Switched Live Out
Switched Live In
Emergency Pack
Mains Gear
Power LED
Batt
IND
Test Switch
Battery pack
4 Cell, 4Ah NiMH
BATTETY +
BATTERY -
5
Indicator LED
4
3
Switched Live
Unswitched Live
AC 220-240V

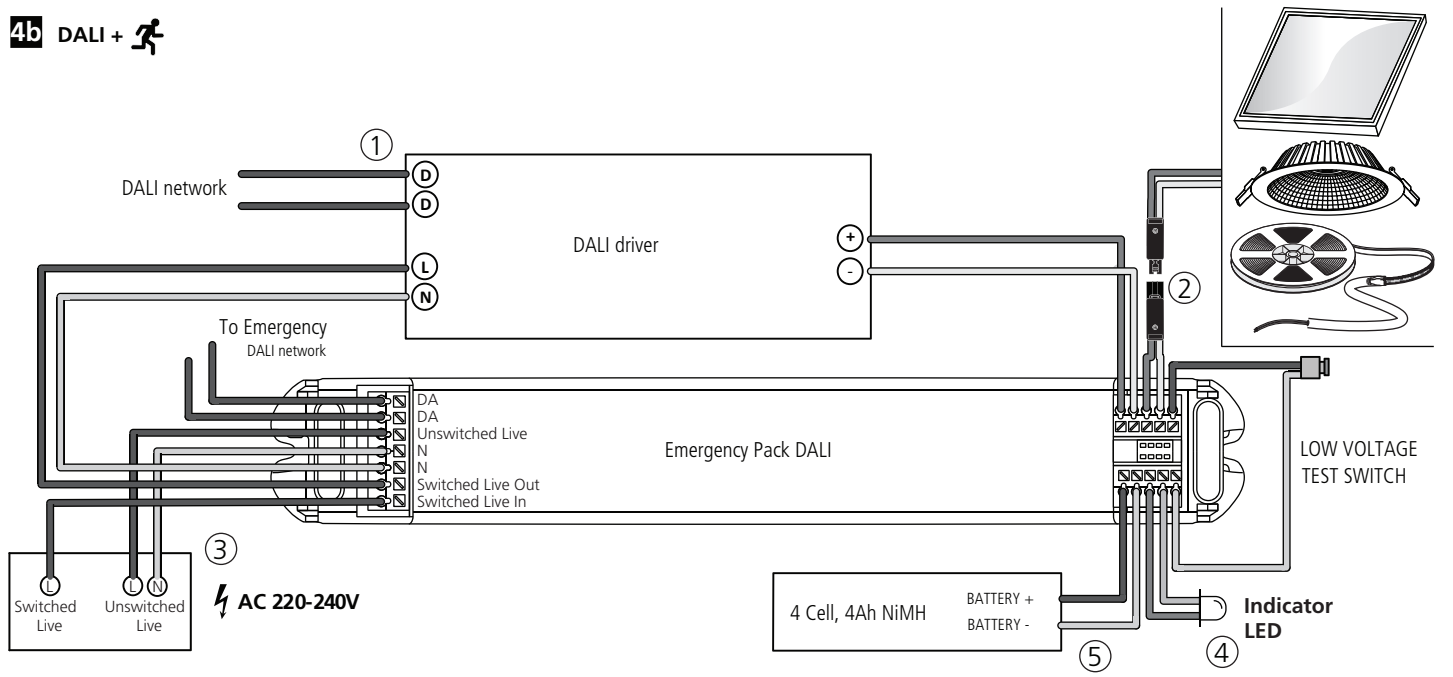
4b
DALI +
1
DALI network
D
D
L
N
DALI driver
+
-
2
To Emergency
DALI network
DA
DA
Unswitched Live
N
N
Switched Live Out
Switched Live In
Emergency Pack DALI
LOW VOLTAGE
TEST SWITCH
3
Switched Live
Unswitched Live
AC 220-240V
4 Cell, 4Ah NiMH
BATTERY +
BATTERY -
5
Indicator LED
4

4c DALI +

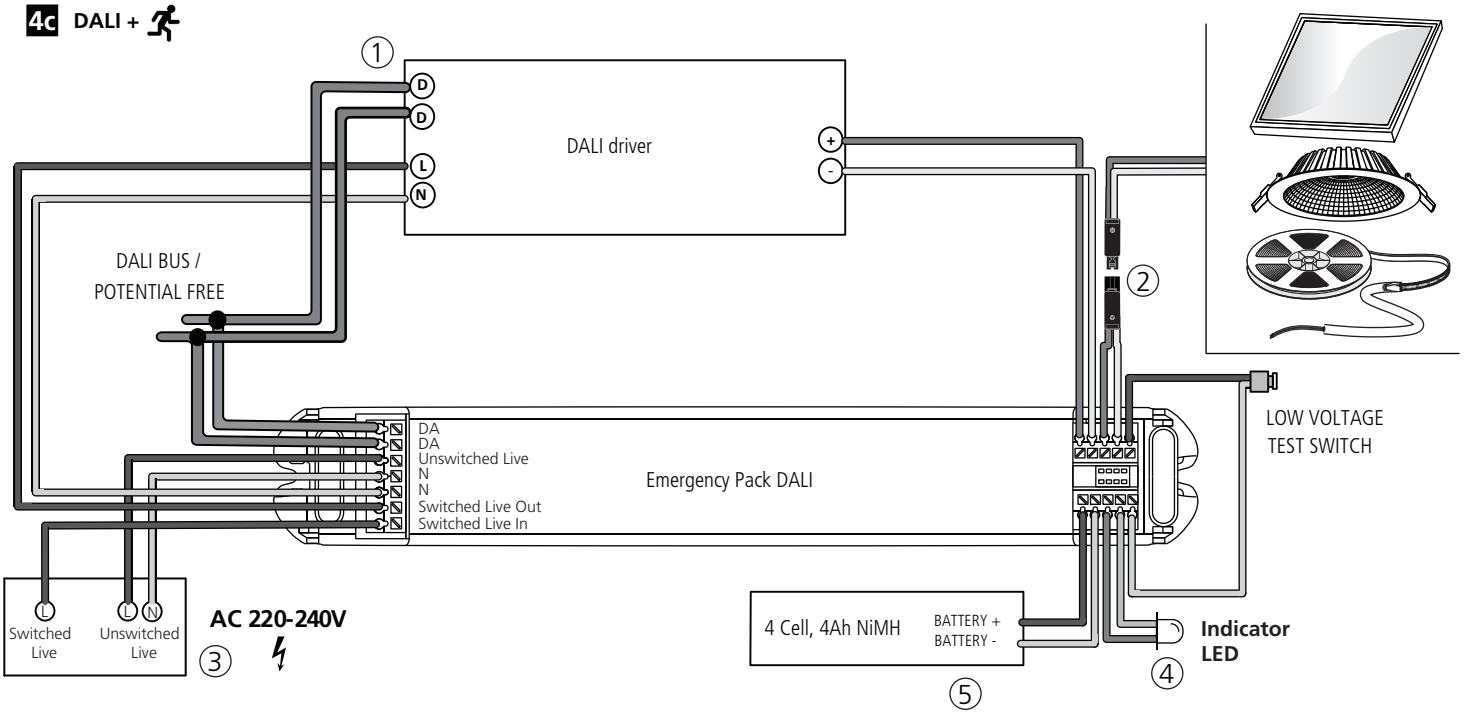

5

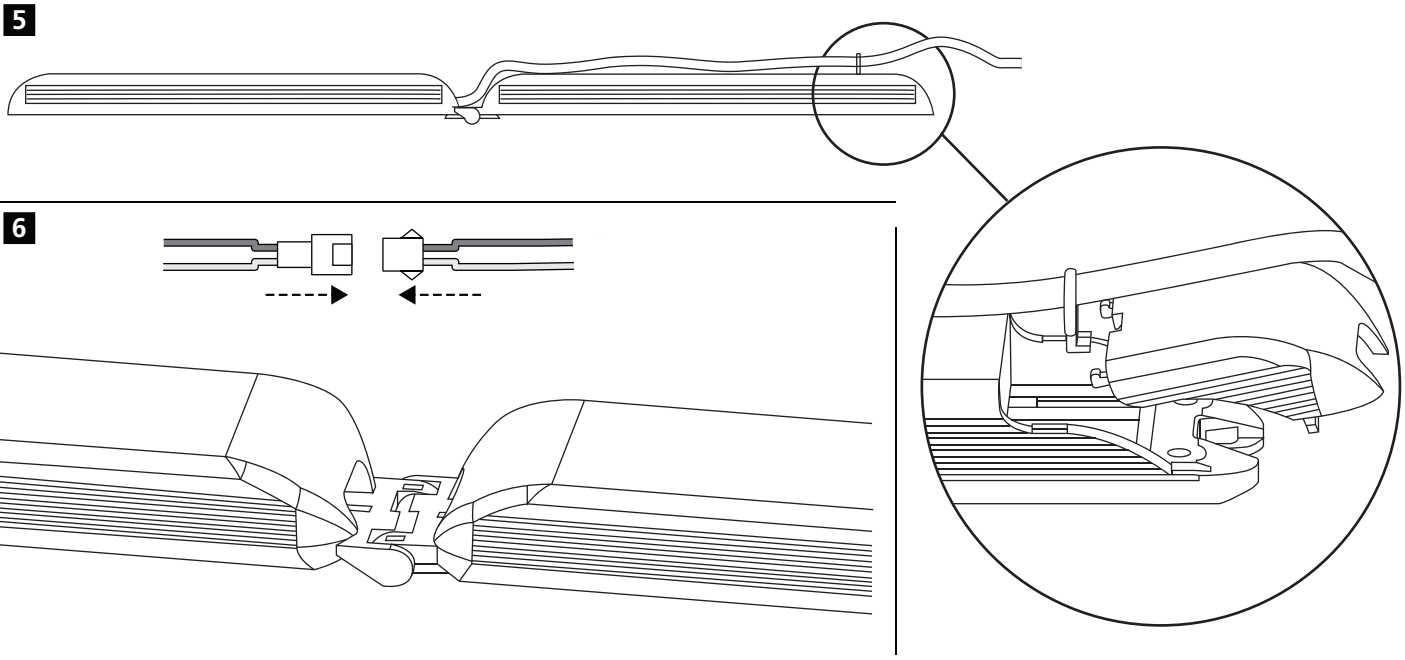

6

7 **i**



ii



iii

iv

COMMISIONING DATE

JAN	FEB	MAR	APR
MAY	JUN	JUL	AUG
~~SEP~~	OCT	NOV	DEC
2010	2011	2012	2013
2014	2015	2016	~~2017~~
2018	2019	2020	2021