

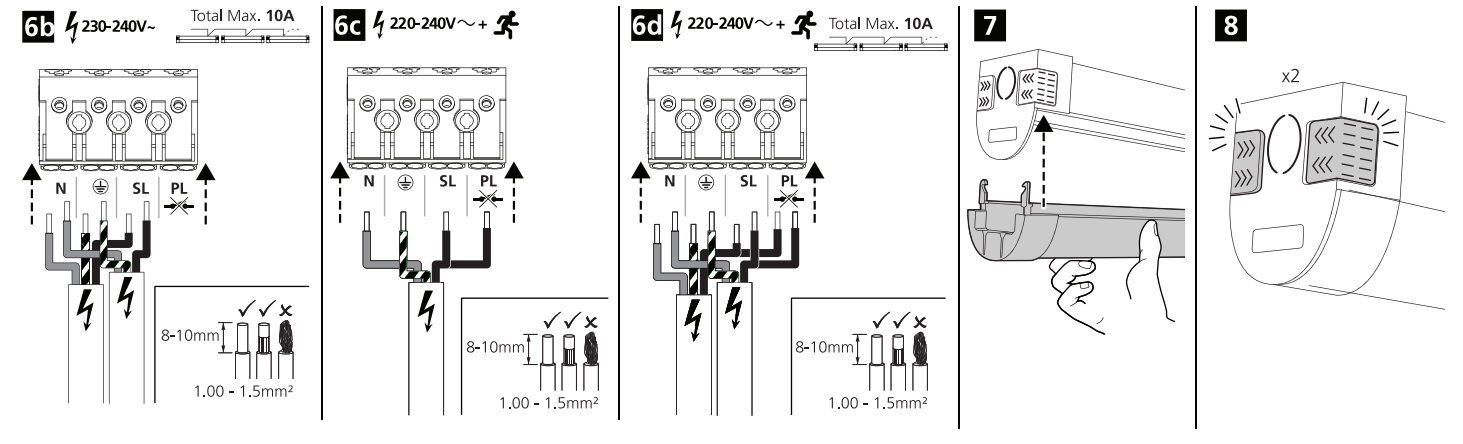
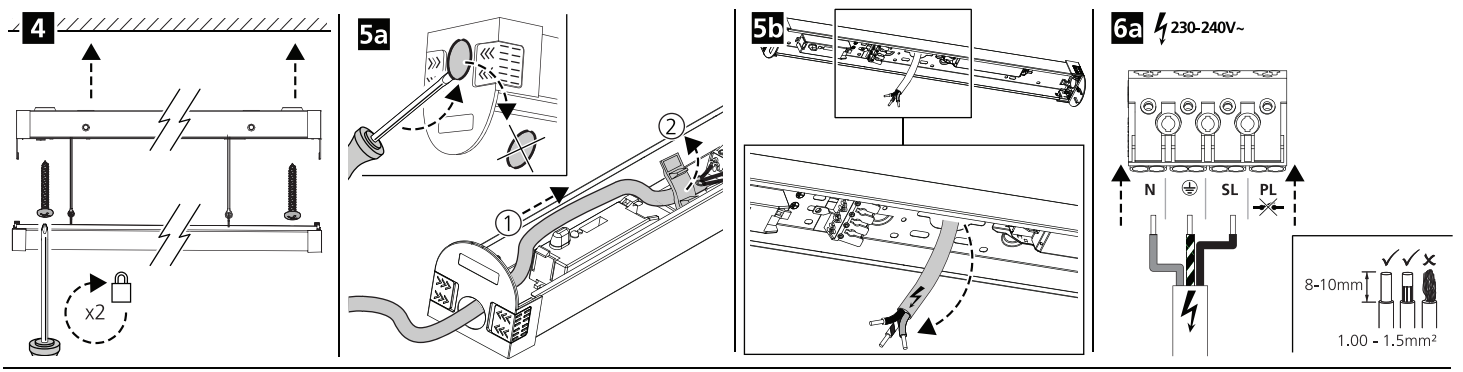
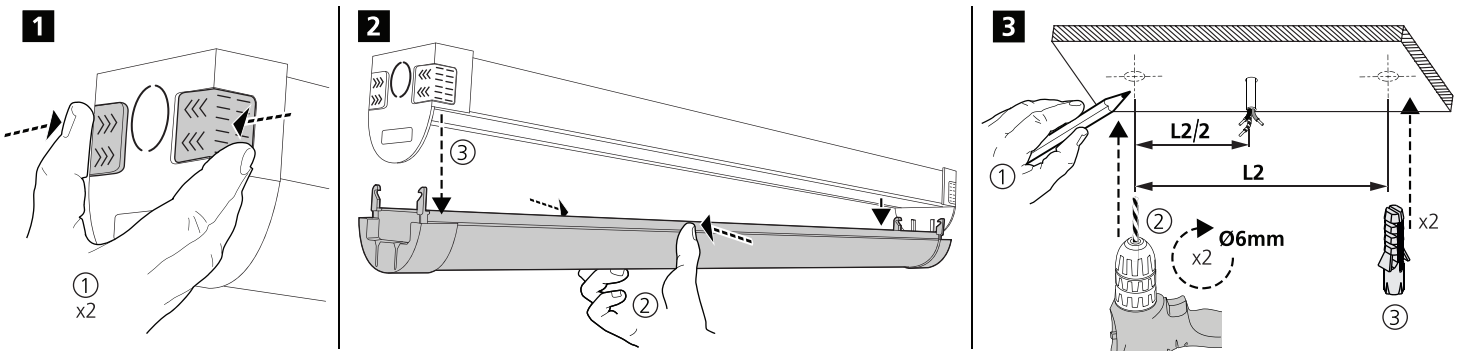
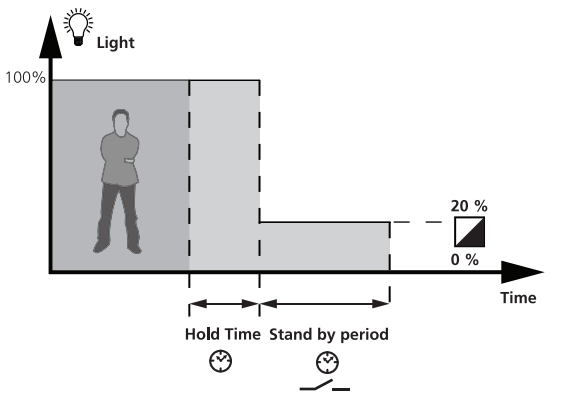


	L1	L2	L3	L4
START Batten 1200	600	926	163	1089
START Batten 1500	600	943	163	1089

START Batten 1200/1500

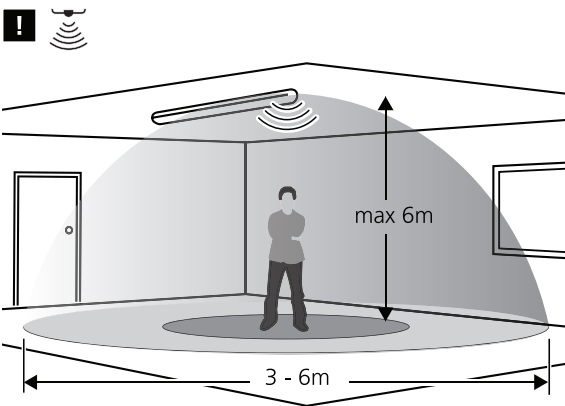

! CCT / Light Output

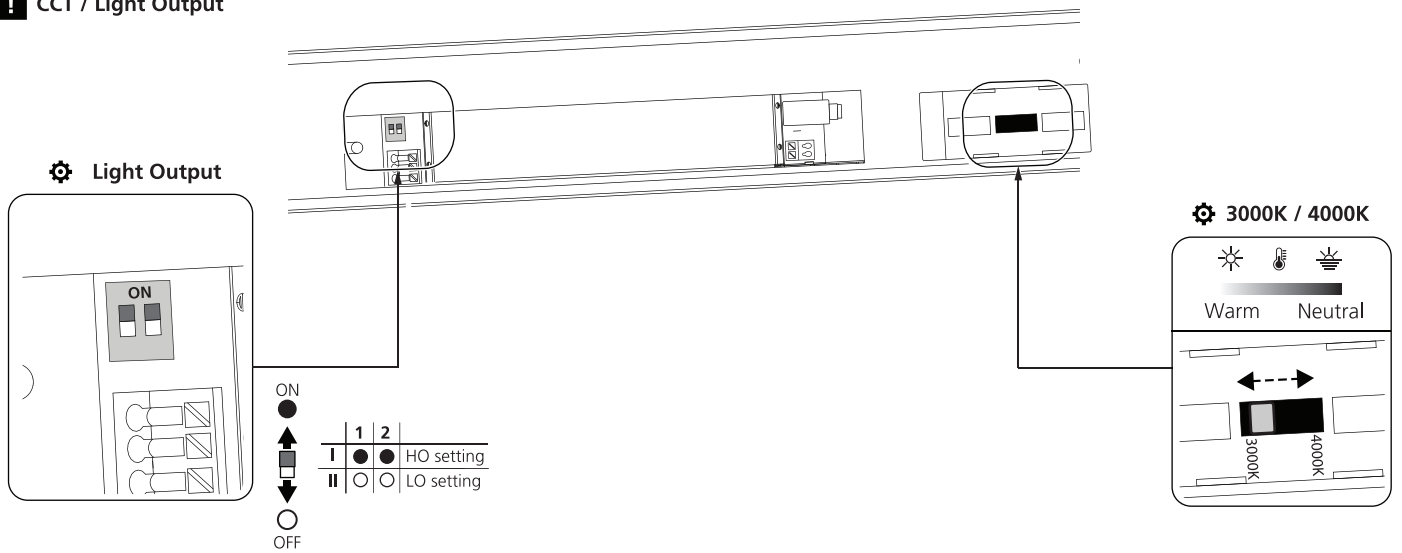

Detection Area

	1	%	Detection Ø
I	○	100%	6m
II	●	50%	3m

Hold Time

	2	3	⌚
I	○	○	5s
II	○	●	1min
III	●	○	3min
IV	●	●	10min

5s ... 25min

Daylight Sensor

	4	Lux
I	○	Disable
II	●	30Lux

Stand-by Dimming Level

	5	%
I	○	0%
II	●	20%

Stand-by Period


	6	⌚
I	○	+∞
II	●	15min

OFF

START Batten self Test Emergency kit





0048987

0°C +40°C

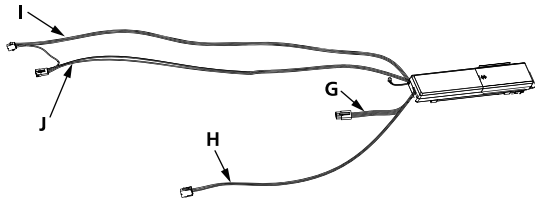


START Batten 600

LED Colour	Status	Flashing		COMMENT
		ON	OFF	
Green		∞	-	✓ Battery Connected and Charging
		0.1 sec	0.1 sec	TEST Functional Test in Progress
		1.0 sec	1.0 sec	TEST Duration Test in Progress
Red		∞	-	Lamp Fault
		1.0 sec	1.0 sec	Battery Needs Replacing
		0.1 sec	0.1 sec	Battery Fault
		-	∞	Emergency Mode

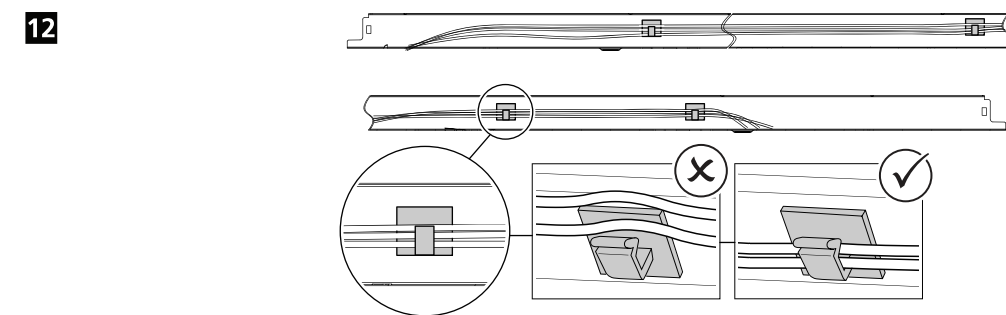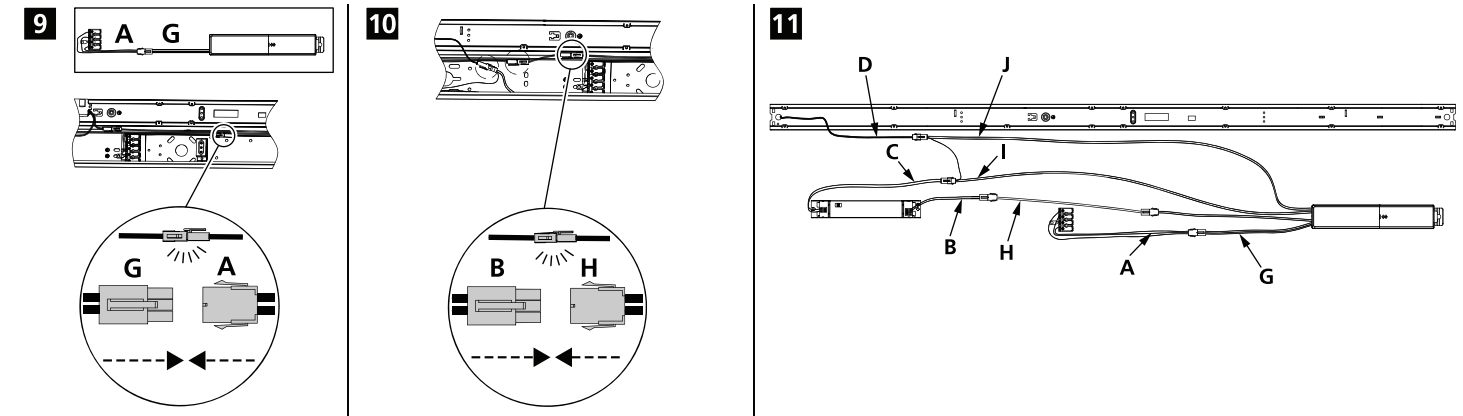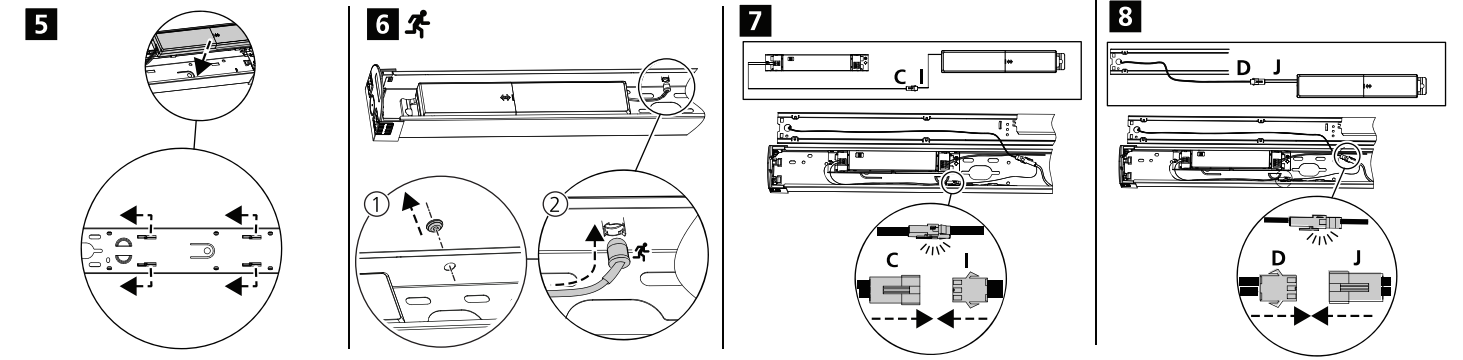
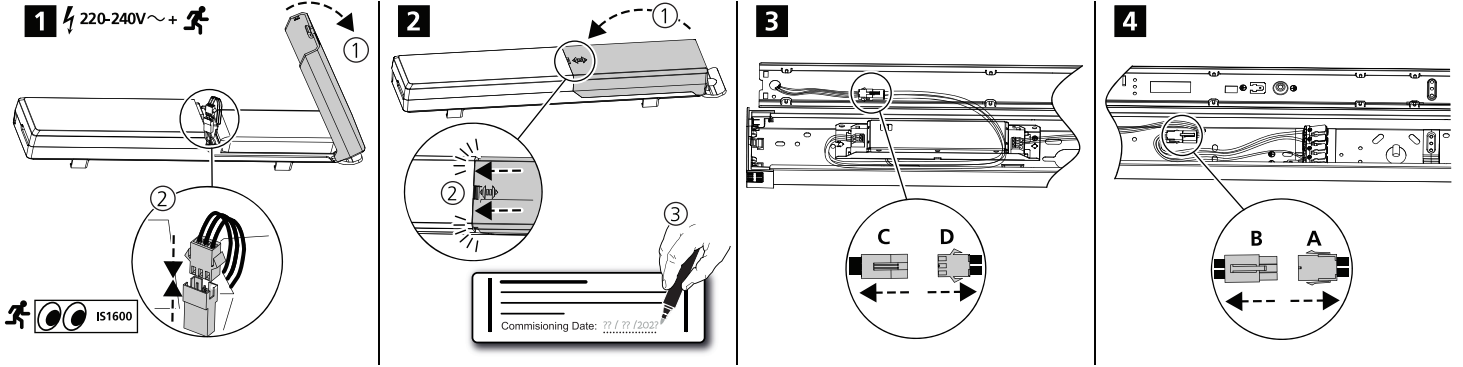


START Batten Suspension kit

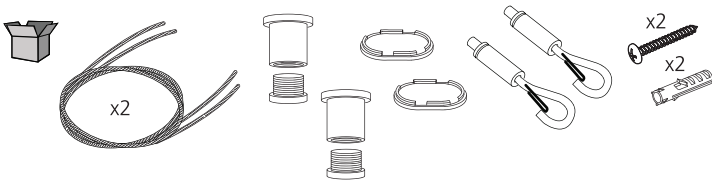

1 START Batten Suspension Kit

0048988

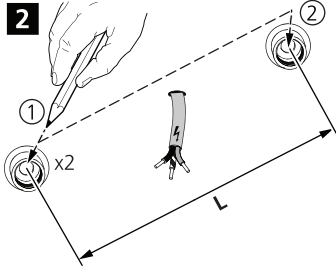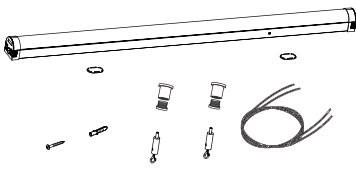

START Batten 1200/1500/1800 884mm

