Lytespan 3 DALI Accessories

IS**1448**A

IS500 | 230-240V~ 50/60Hz

DO NOT INSULATION TEST WITH SPOTLIGHTS INSTALLED ON THIS TRACK

RH - Right Hand
LH - Left Hand
LI - Live Inside
LO - Live Outside

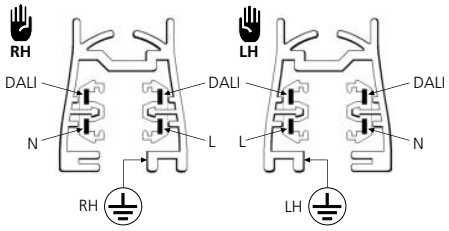

For DALI Luminaires ONLY fitted with DALI adaptors.



***** There can be no closed rings in the wiring and the maximum distance between the gateway and the DALI unit is 300 m.

Lead Length	**Minimum Lead Diameter**
up to 100 meters	0.5mm²
100-150 meters	0.75mm²
above 150 meters	1.5mm²

The maximum lead length between two connected systems must not exceed 300 meters.

1 **Live-End**



2



3



4



5



L, T & X Couplers*

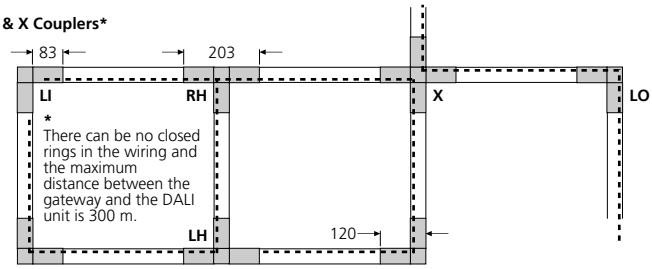

1

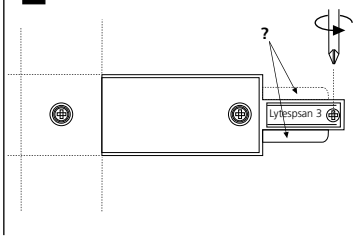

2

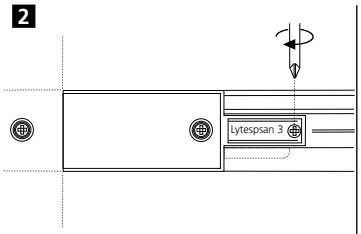

3



End Cap



Covers



? 1

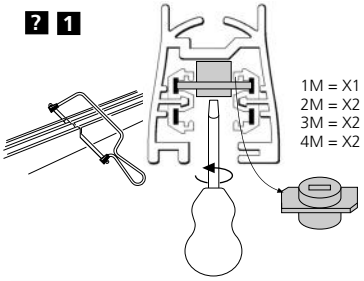

2



3



4



5

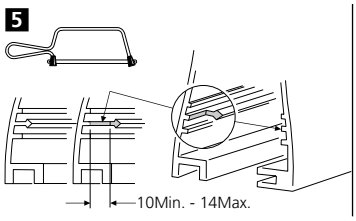

6



7



8



Concord by SYLVANIA

© Concord Lighting Limited 12.16