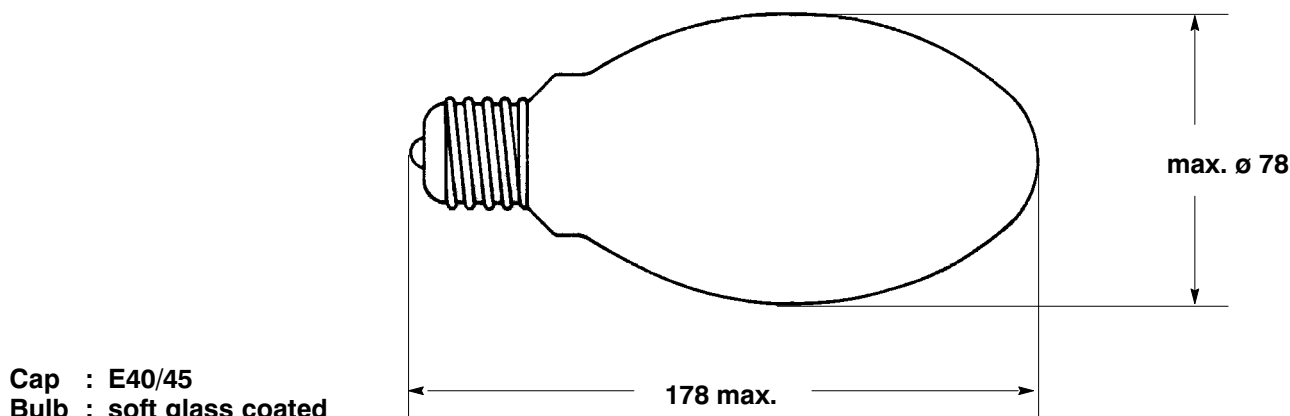
DIMENSIONS (mm)ELECTRICAL DATA:

		NOMINAL VALUE	MIN.	MAX.
Lamp Wattage	(W) :	100		
Lamp Voltage	(V) :	100	85	115
Lamp Current	(A) :	1.2		
Lamp Warm-up Current	(A) :		1.2	2.4

OPERATING CONDITIONS:

Burning Position	:	any		
Ballast Type	:	SHP-100W/220V,230V, 240V,250V		
Voltage Current ratio	:	148		
Calibration Current	:	1.2		
Supply Voltage	(%) :		92	106
Ignitor Pulse	(kVp) :		2.8	5
Compensation Capacitor	(μ F) :	12		
Cap Rim Temperature	($^{\circ}$ C) :			210
Bulb Temperature	($^{\circ}$ C) :			310

LAMP LIFE :

Rated Average Life	(h) :	24000 (50% survival rate)
T 90	(h) :	12000 (90% survival rate)

PHOTOMETRIC DATA :

Initial Luminous Flux	(lm) :	8500
Luminous Efficacy	(lm/W) :	85
Correlated Colour Temperature	(K) :	2000
Colour Rendering Index	(class) :	4

ATTENTION : Lamps comply with the requirements of IEC publication 60662. Ballasts and ignitors must comply with IEC 60923 and 60927 respectively. Luminaires must be in accordance with IEC 60598-1 and 60598-2-3. Inspection is in accordance with IEC 60410.

Issued by : TIENEN
Date : 31.08.2009
Revision date : 29.03.2010

DATA SHEET

Specification No. : 45-04-100/A
Supersedes : 45-04-100
Page 1 of 1